



RIN-AT Series

Controller (for Auto-door)



Auto-door Controller

Weight : 0.7Kg(Approx)

Typical Applications

자동문, 기타장비


- 32bit Micro Controller입니다.
- 본 제품은 자동문용으로 그 외 사용은 금합니다.
- Display에 의 한 동작 확인 및 Setting을 할 수 있습니다.
- I/O Board 일체형으로 공간 활용력이 좋습니다.
- -20℃ ~ +60℃ 사용 가능

Specification

Mode	AT200SSA(ME12)	AT200SSA(SOE100)
Supply Voltage	AC24V ± 10% or DC24V	
DC Current	Motor : about 5.0A Logic : 0.7A (except External Output Current)	
Motor Encoder	Exclusive Encoder used (24ppr)	Exclusive Encoder used (100cpr)
Motor Spec	50W~90W (DC Motor)	
Motor Lock (Brake)	Selected by user	
Safety Sensor	Exclusive Safety Sensor used	
Display	7-Segment (11.7 * 19 mm)	Display from 000 to 999 (Only Number)
Button	4 Buttons (Menu, Setup, Up, Down)	
Status LED	2 LED(Red Color)	(External Safety Sensor Input, Open Input)
External Output Voltage	DC12V (Max. 1A)	
Buzzer	Ok	
Max. Speed	About 1m/s (90W, Weight: 150Kg)	

- 본 표준형 외에 필요에 따라 특수품으로 개발 가능합니다.

Interface

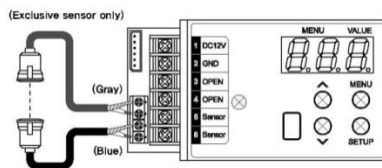

1. DC 12V Output
2. GND
3. Open
4. Open
5. External Safety Sensor
6. External Safety Sensor

Dimensions

